



MOBILE TOWER LIGHT YTG6000-TL4



Specification & Dimensions

MOBILE TOWER LIGHT MODEL	YTG6000-TL4
Output rating	7.5 kVA
Frequency / RPM	50 Hz / 1500 RPM
Voltage (2+N)	220 V
Tire size	7.00-14C 100/991 (ban cangkul)
Light tower handling	Manual hand operated winch with safety brake
Maximum Height	5-Section Telescopic Mast up to 6.77 m
Mast Type	Manual
Lamps	4 x 500 W
Lamps Type	LED
Total Lumens	4 x 65.000 lm = 260.000 lm
Maximum Dimensions (in working mode)	L x W x H : 3559.5 x 2730 x 6770 mm
Minimum Dimensions (in working mode)	L x W x H : 3559.5 x 1594 x 2770 mm

Note: This specification is subject to change without notice due to our continuous product improvement.




MOBILE TOWER LIGHT

YTG6000-TL4


Specification & Dimensions

ENGINE MODEL		3TNV76
Type of combustion chamber		Direct Injected
Air intake system		Natural Aspiration
Bore (mm) x stroke (mm)		76 x 82
Piston displacement (cm ³)		1115
No. of cylinders		3
Fuel		Diesel Fuel ASTM 2D
Fuel consumption (L/hr) at 100% load	50 Hz	2.5
Lubricating oil capacity (L)		3.5
Coolant capacity (L)		1.0
Starting motor (v-kW)		12 - 0.9
Charging generator (V-A)		12 - 15
Battery capacity (V-Ah)		12 - 35 x 1
Starting system		Electric Starting Motor
Cooling system		Radiator with fan
Lubricating system		Forced lubrication with trochoid pump
Sound Level dBA from 1 meter / 7 meter (dBA)		73 / 63
Total Weight (kg)		970

Maximum Dimensions (Working Mode)

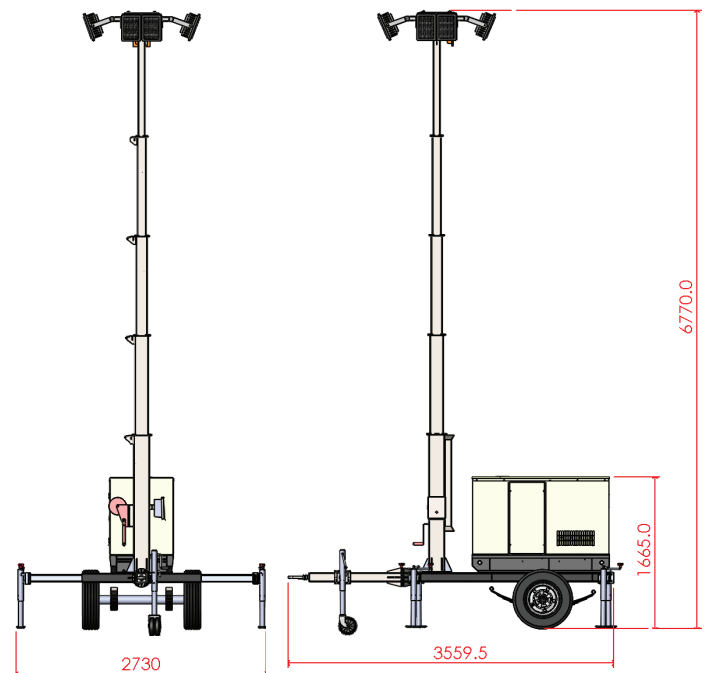

Minimum Dimensions (Working Mode)

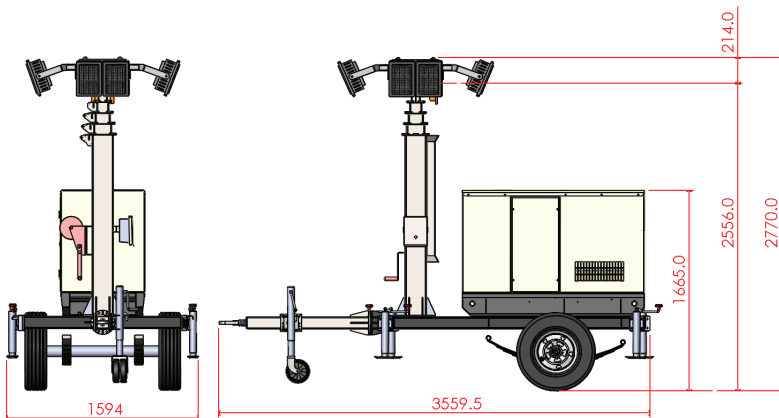

Note: This specification is subject to change without notice due to our continuous product improvement.