



YTG6000MX

(5.5 kVA / 1-Phase / TNM Series)

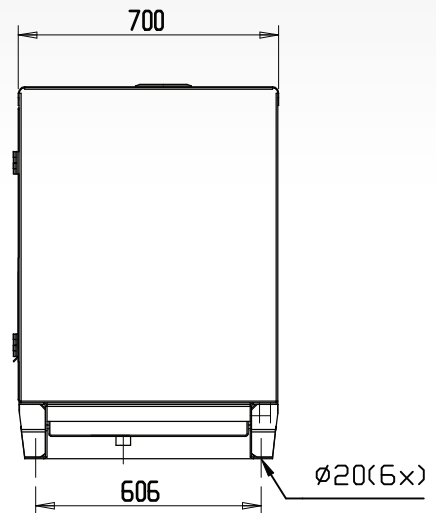

Silent Type Dimension (mm)

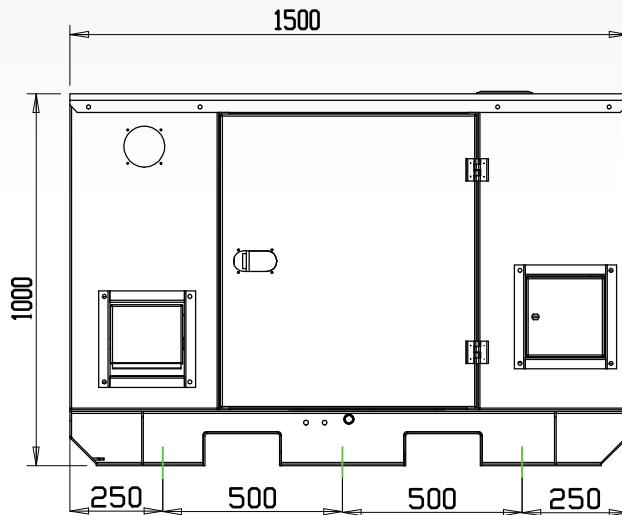

Genset & Engine Specification

AC Generator Model			YTG6000MX
Output rating (kVA)	50 Hz	380V	Prime 5.5
			Standby 6.0
	60 Hz	440V	Prime -
			Standby -
Rated current (A)	50 Hz	Prime 25.0	
		Standby 27.2	
	60 Hz	Prime -	
		Standby -	
Rated frequency / rated speed	50 Hz	1500 RPM	
	60 Hz	-	
No. of poles	4 poles		
Phase and wire	1-Phase 2-Wire		
Power factor	1.0		
Voltage regulation	Within +/- 1.5 %		
Excitation	Brushless, Rotating Exciter (with AVR)		
Insulation	Class 'H'		
Approx dry weight (silent)	kg	400	
Sound Level dBA from 1 meter / 7 meter	dBA	73 / 63	
Approx dry weight (open)	kg	-	

Engine Model		3TNM72-GGE
Type of combustion chamber		Indirect Injection
Air intake system		Natural Aspiration
Output rating (HP)	1500 RPM (50 Hz)	6.6
	1800 RPM (60 Hz)	7.3
Rated speed (50/60 Hz, rpm)		1500
Bore (mm) x stroke (mm)		72 x 74
Piston displacement (cm ³)		904
No. of cylinders		3
Fuel		Diesel Fuel ASTM 2D
Fuel consumption (L/hr) at 100% load	50 Hz	1.93
	60 Hz	-
Lubricating oil capacity (L)		2.9
Coolant capacity (L)		1.0
Fuel tank capacity (L)	sound proof	40
	open skid	-
Starting motor (v-kW)		12 - 0.9
Charging generator (V-A)		12 - 15
Battery capacity (V-Ah)		12 - 35 x 1
Starting system		Electric Starting Motor
Cooling system		Radiator with fan
Lubricating system		Forced lubrication with trochoid pump

POWERED BY :

