



Powered by




YSP15064

DEWATERING PUMP

YSP15064

DEWATERING PUMP

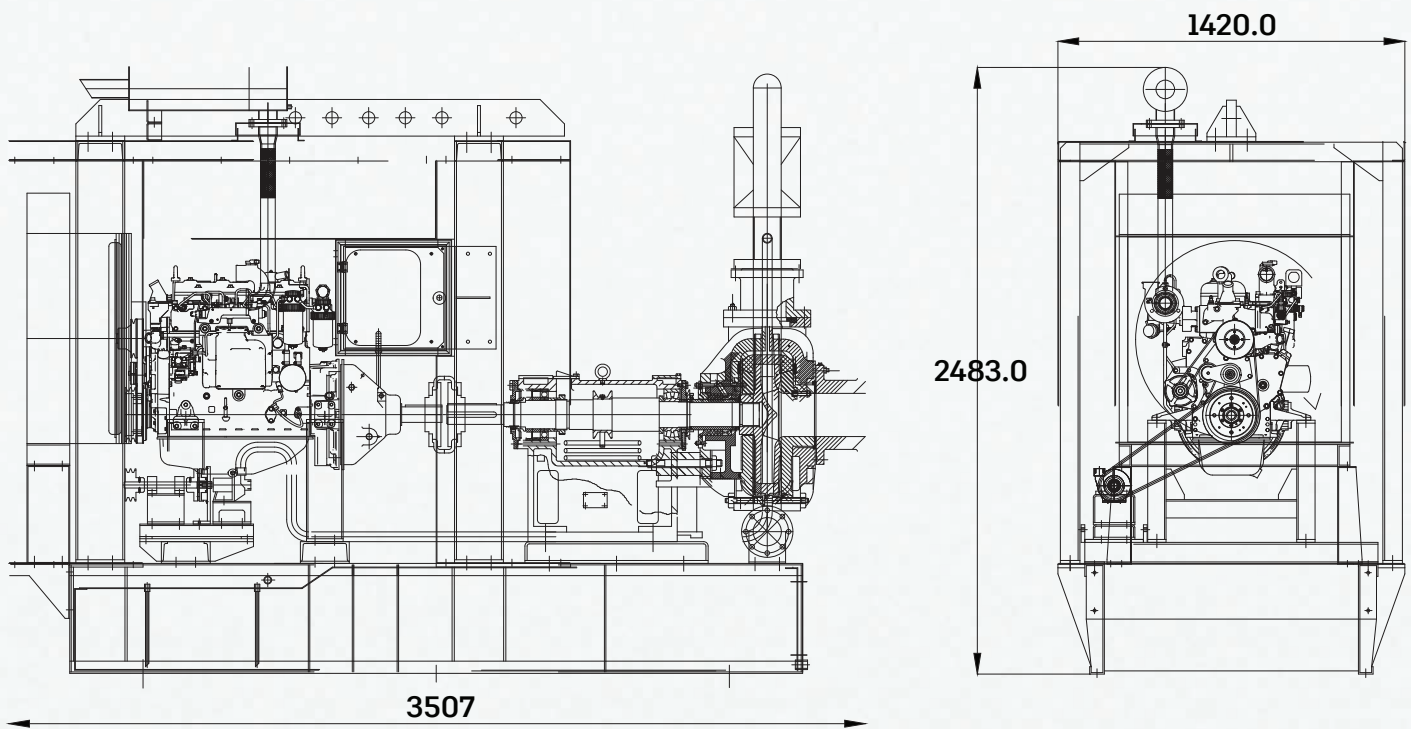

GENERAL INFORMATION

152 x 100 Centrifugal Slurry Pump

Type 100ZGB


Gland Seal - Conventional Packed, Oil-lubricated

Passage Size - 1 inch

CONSTRUCTION

Pump Casing	Ductile Casting Iron (QT500-7)
Impeller	KmTBCr26 (Anti-wear Alloy)
Shaft	Carbon Steel (25#)
Sleeve	2Cr13







ENGINE

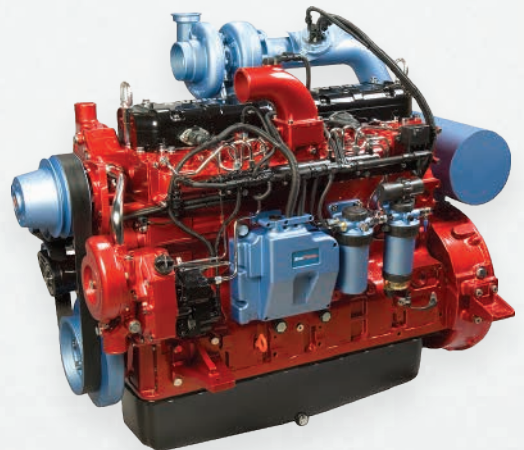

SISU Power 49CWA-4V

YSP15064 utilizes this State-of-the-Art engine technology which delivers performance and durability.

ENGINE SHOWCASE

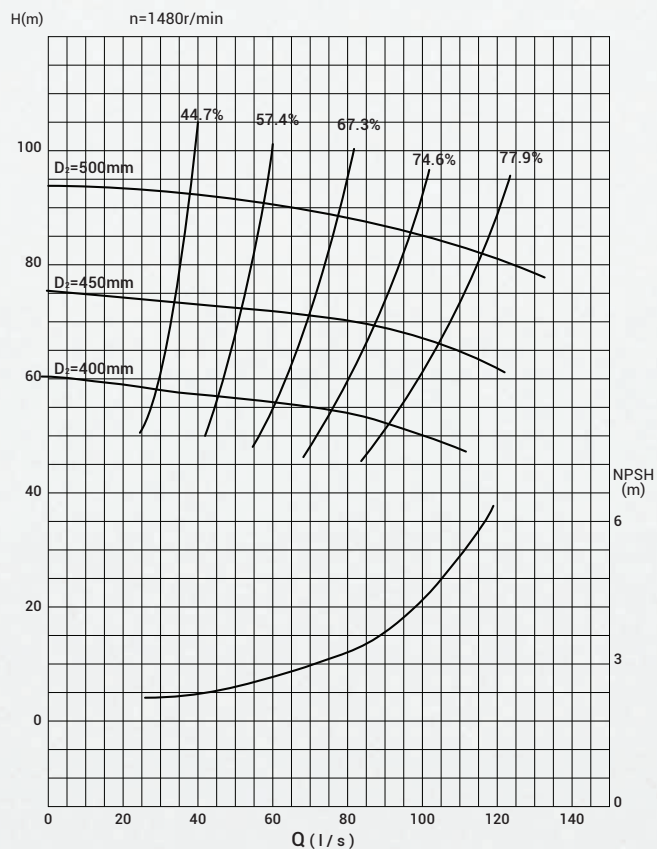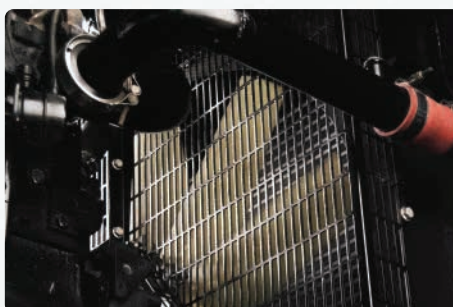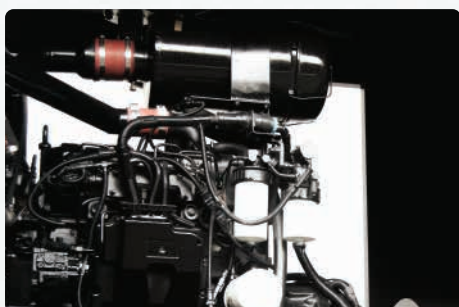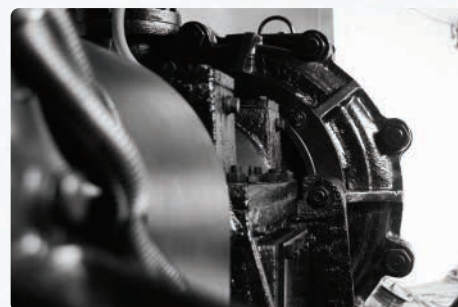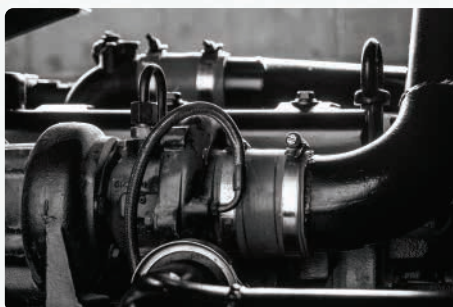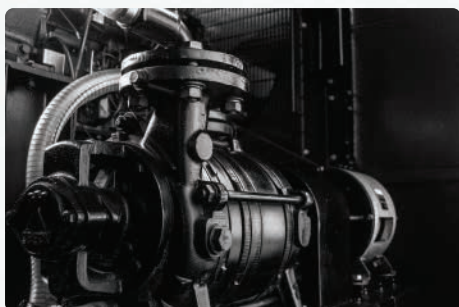

DIMENSION & CAPACITY

Height	2483 mm
Length	3507 mm
Width	1420 mm
Weight	4000 kg
Fuel Capacity	1100 litres

PERFORMANCE

Maximum Flowrate	160 litres per second
Shutoff Head	60 metres

Powered by





PT. SUMBER ANEKA ENGINEERING

Jl. Raya Perancis, Pergudangan Ocean Park
Kav 38 Blok AC, Kosambi, Tangerang

☎ 021-556-0572/73

🌐 www.yamagen-power.com

✉ sales@yamagen-power.com